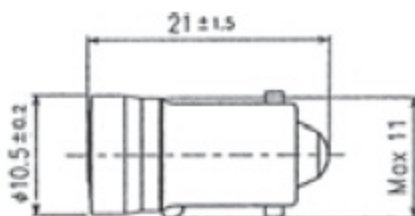
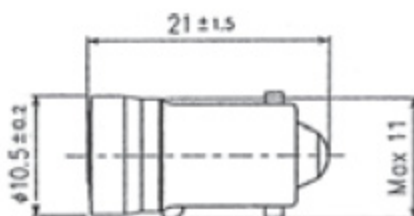


A3/25

BA9S - TYPE COURT - 8 CHIPS (avec pont redresseur) \emptyset 10 x 21 mm - Short Type (with bridge rectifier) - AC/DC

CODE STOCK PART NUMBER	RÉFÉRENCE	VOLTS	MA	MCD	LONG. ONDES WAVE LENGTH (NM)	ANGLE	COULEUR COLOR
010653	8 B 1020 R 12	12	32	104	630	120°	ROUGE/RED
010654	8 B 1020 G 12	12	32	156	565	120°	VERT/GREEN
010655	8 B 1020 Y 12	12	32	110,5	585	120°	JAUNE/YELLOW
010657	8 B 1020 R 24	24	16	104	630	120°	ROUGE/RED
010658	8 B 1020 G 24	24	16	156	565	120°	VERT/GREEN
010659	8 B 1020 Y 24	24	16	110,5	585	120°	JAUNE/YELLOW
010661	8 B 1020 R 28	28	16	104	630	120°	ROUGE/RED
010662	8 B 1020 G 28	28	16	156	565	120°	VERT/GREEN
010663	8 B 1020 Y 28	28	16	110,5	585	120°	JAUNE/YELLOW
010665	8 B 1020 R 48	48	16	104	630	120°	ROUGE/RED
010666	8 B 1020 G 48	48	16	156	565	120°	VERT/GREEN
010667	8 B 1020 Y 48	48	16	110,5	585	120°	JAUNE/YELLOW

A3/26

BA9S TYPE COURT - HAUT VOLTAGE - MULTI CHIPS \emptyset 10 x 21 mm - Short type high voltage - AC

Température : -20/+50°C

Operating temperature : -20/+50°C

CODE STOCK PART NUMBER	RÉFÉRENCE	VOLTS AC	MA	MCD	NBRE DE CHIPS CHIPS	COULEUR COLOR
010840	8 B 1020 R 130	130	7,5	385	8	ROUGE/RED
010841	8 B 1020 G 130	130	7,7	200	2	VERT/GREEN
010842	8 B 1020 Y 130	130	7,5	350	8	JAUNE/YELLOW
010843	8 B 1020 B 130	130	7,7	50	2	BLEU/BLUE
010844	8 B 1020 R 230	230	6,4	315	8	ROUGE/RED
010845	8 B 1020 G 230	230	6,5	185	2	VERT/GREEN
010846	8 B 1020 Y 230	230	6,4	260	8	JAUNE/YELLOW
010847	8 B 1020 B 230	230	6,5	45	2	BLEU/BLUE